



# MOORECONCRETE

## PRECAST CONCRETE BOX CULVERT



Individually designed for each contract

Box culverts manufactured to highest standards

[www.moore-concrete.com](http://www.moore-concrete.com)




CE Manufactured to EN 14844

# PRECAST CONCRETE BOX CULVERTS

## WIDE VARIETY OF USES

- Culverting of Water Courses
- Service Tunnels
- Cattle Underpasses
- Subways
- Attenuation Systems
- Escape Tunnels
- Sea Outfalls
- Road Crossings
- Pipe Replacement
- Shafts
- Caisson Units
- Channels

## PROFILE

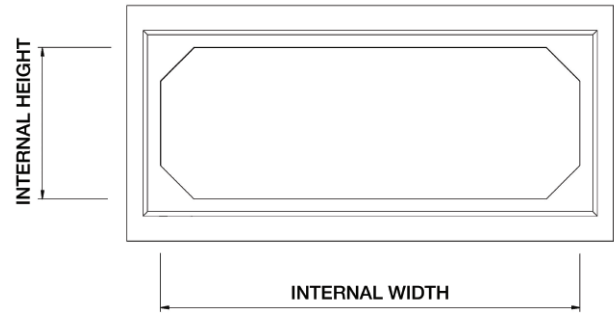

## SIZES

	1000	1100	1200	1300	1500	1800	2100	2400	2600	2800	3000	3200	3400	3600	3800	4000	4200	4400	4600	4800	5000	
500	■	■	■	■	■	■	■															
600	■	■	■	■	■	■	■															
700	■	■	■	■	■	■	■															
800	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1000	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1100	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1200	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1300	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1400	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1500	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1600	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1700	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1800	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1900	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2000	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2100	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2200	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2300	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2400	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2500	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

For sizes not shown on this table, please contact Technical Sales.

Available in lengths of 1.50m, 2.00m or as required.

 Manufactured to EN 14844

## DESIGN

We can offer a full design service if required to meet individual project specifications.

Units are designed to meet the loading requirements needed. We can produce units with low flow channels, end walls, manhole openings, dual cell culverts and many other special elements.

## ATTENUATION SYSTEMS

We have developed a method of casting our box culverts which incorporates a Dry Weather Flow. This sloping soffit is cast in a single operation with the main Culvert Unit. The attenuation units offer a more robust alternative to a secondary cast and come with end walls, access points and pipe openings.

## JOINTS

Units utilise a socket and spigot joint connection which can incorporate joint sealants, where required. Information available on request.

Moore Concrete Products Ltd, Caherty House, 41 Woodside Road, Ballymena, County Antrim, Northern Ireland BT42 4QH

Tel: 028 2565 2566 Fax: 028 2565 8480

Web: [www.moore-concrete.com](http://www.moore-concrete.com) Email: [info@moore-concrete.com](mailto:info@moore-concrete.com)



INVESTOR IN PEOPLE

