



MOORECONCRETE

SLURRY TRANSFER CHANNEL



Precast Concrete Channel

Available with a range of diagonal slats & solid covers

www.moore-concrete.com



CE Marked


SLURRY TRANSFER CHANNEL

Moore Concrete manufacture a range of precast concrete channels with covers and diagonal slats to compliment the range. Channels are used for a variety of applications including the transfer of slurry and washings, cable troughs and service ducting. When used for liquid transfer the channels rely on the force of gravity to ensure free flow, reducing the need for mechanical operations.

CHANNEL DIMENSIONS

Width (mm)	Depth (mm)	Length (mm)	Weight (kg)
800	500	2400	1100
1000	1000	2350	1700
1500	1000	2400	2240

CE Manufactured to EN 13225

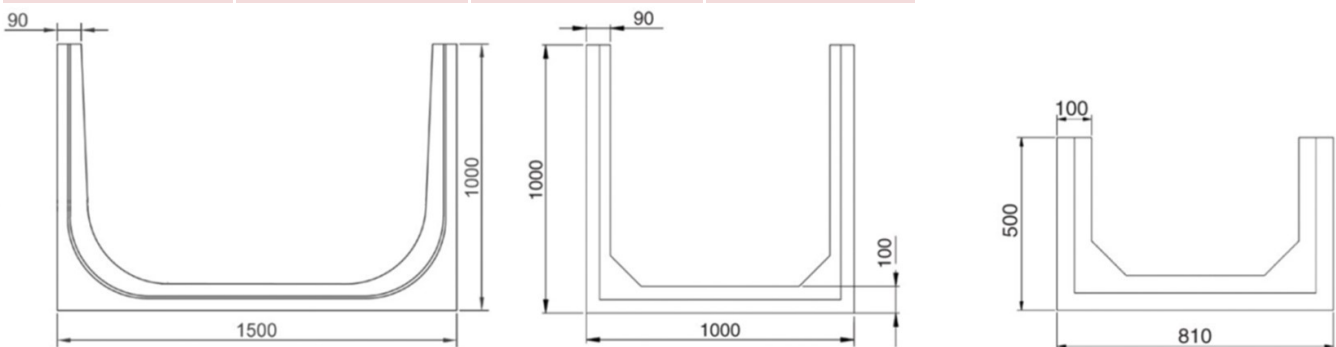





Ease of Installation Each unit has 4 Nr. 16mm sockets cast into the top of the wall, this allows the channel to be quickly set into position – refer to product handling instructions for further details.



Channels Interlock using a spigot and socket joint system which aids alignment during installation and the sealing process.

Solid/blank ends are available upon request.

Smooth finish allows free flow of material through the channel.

COVERS FOR SLURRY CHANNEL

Cover Type	Width (mm)	Depth (mm)	Gap (mm)	Length (mm)	Loading Capacity
Diagonal Slat	1000 to suit 1000 channel	178 (7")	36	2400	 Up to 800 kg  Up to 4.5 ton axle loading  Up to 8.0 ton axle loading
	1500 to suit 1500 channel	178 (7")	40	1360 Middle Section 1200/400 End Section	
Solid Cover	1200 1500	150 (6")	-	1200	 Up to 7.5 ton axle loading

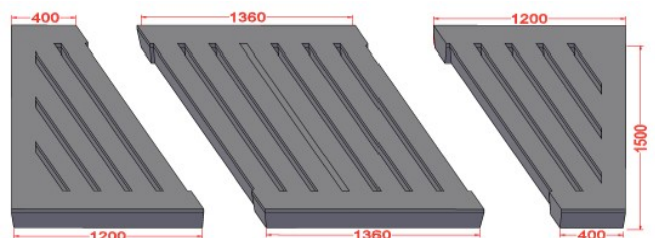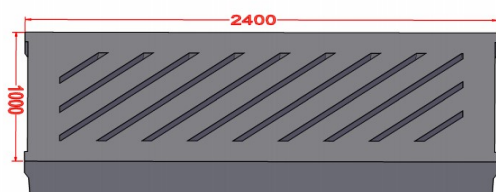

Moore Concrete Products Ltd, Caherty House, 41 Woodside Road, Ballymena, County Antrim, Northern Ireland BT42 4QH

Tel: +44 (0) 28 2565 2566 Fax: +44 (0) 28 2565 8480

Web: www.moore-concrete.com Email: sales@moore-concrete.com



INVESTORS IN PEOPLE
We invest in people Gold